



KNOCKOUT TABLE:

H =	9/32" KD
G =	1/2", 3/4", 1" KD
B =	1", 1-1/4", 1-1/2" KD
D =	3/4", 1", 1-1/4" KD

WIRE RANGE TABLE :

CONNECTOR	COPPER SOLID STRAND	ALUMINIUM SOLID STRAND
LINE	14-8 14-2	12-10 12-2
LOAD	14-10 14-10	---
NEUTRAL HOLE LARGE	12-8 12-1/0	10 10-1/0
NEUTRAL HOLE SMALL	14-8 14-4	12-10 12-4
EQUIP. GRND. HOLE	12-2 12-2	12-2 12-2

3 CIRCUIT 70 AMP. LOAD CENTER
 30AMP CIRCUIT BREAKER 1-POLE (2X)
 20AMP CIRCUIT BREAKER 1-POLE

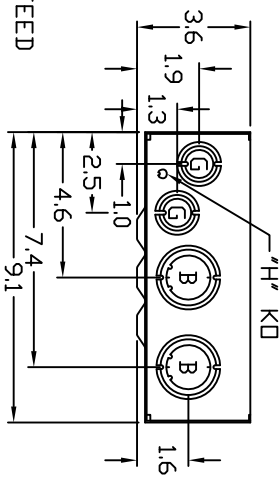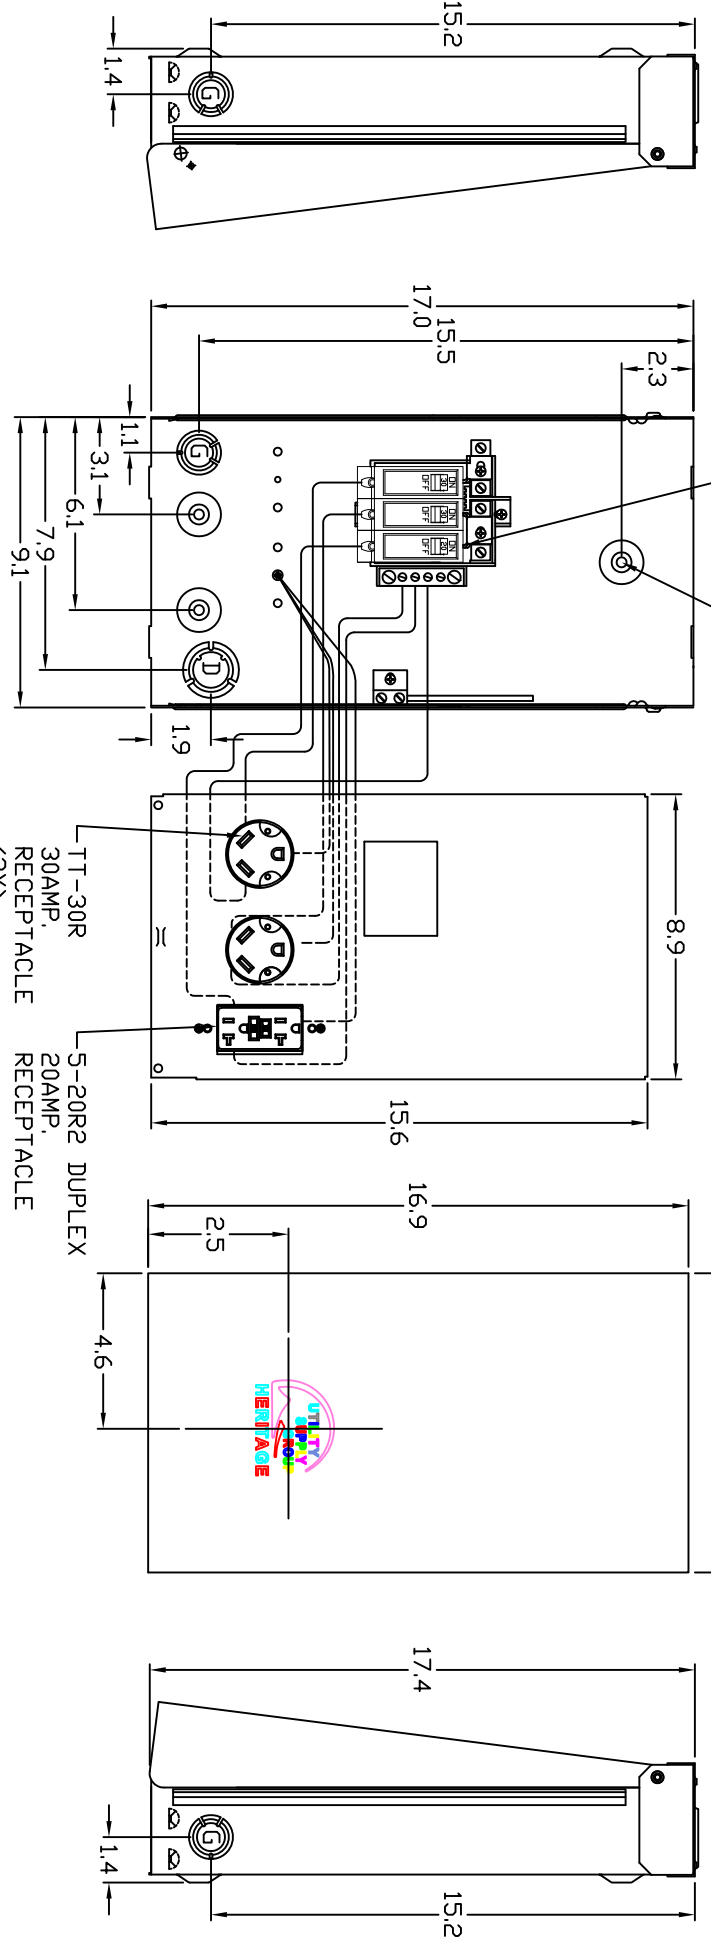

NOTES:
 LUG TYPE IS LOOP FEED

Dr. By: ST	Dt: 11-16-09
Ch. By:	Dt: 11-16-09
CR: R0729847	Dt: 11-16-09



SH165

* = Critical To Quality
 Unless Otherwise Specified
 Autocad Generated
 Tolerances Dnn 3 Pl, Decimals ± .010
 Fractions 32
 Angles ± 1/2°
 Holes ± .003
 Dimensions Are In Inches

SCALE	1 : 1	SIZE	A
SHEET	1	OF	1

TITLE: H61SM3
 OUTLINE DRAWING
 DWG NO: 198B8604

Rev.1 CR R0729847 ST 11-16-09
 Rev.2 CR R1318112 DJ 09-16-13