
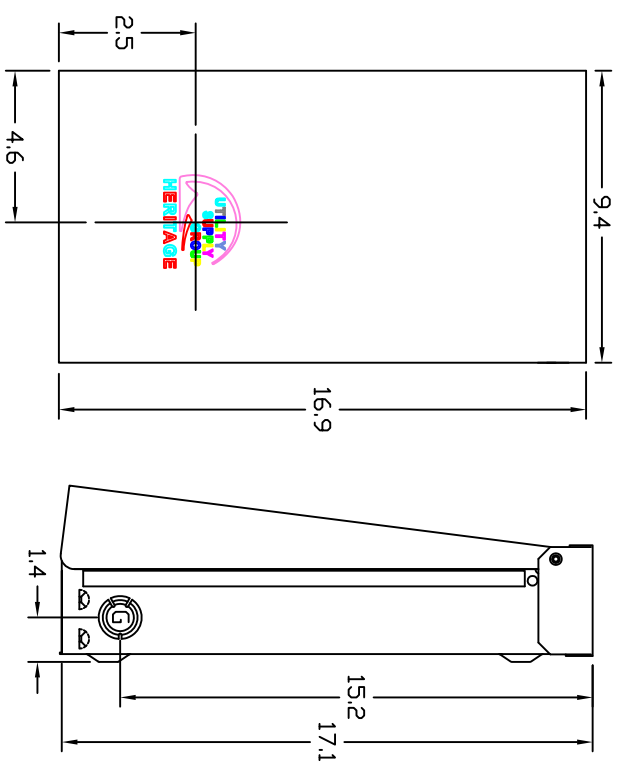
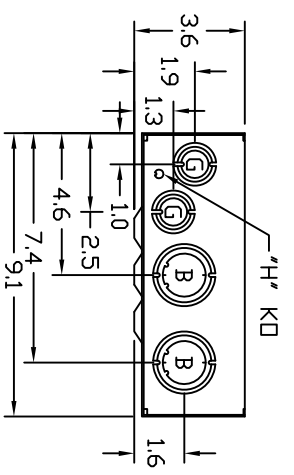


KNOCKOUT TABLE:

H =	9/32" KD
G =	1/2", 3/4", 1" KD
B =	1", 1-1/4", 1-1/2" KD
D =	3/4", 1", 1-1/4" KD

5 CIRCUIT 100AMP. LOAD CENTER
 50AMP CIRCUIT BREAKER 2-POLE
 30AMP CIRCUIT BREAKER 1-POLE
 20AMP CIRCUIT BREAKER 1-POLE
 SPACE
 5/16" MOUNTING HOLE (3X)

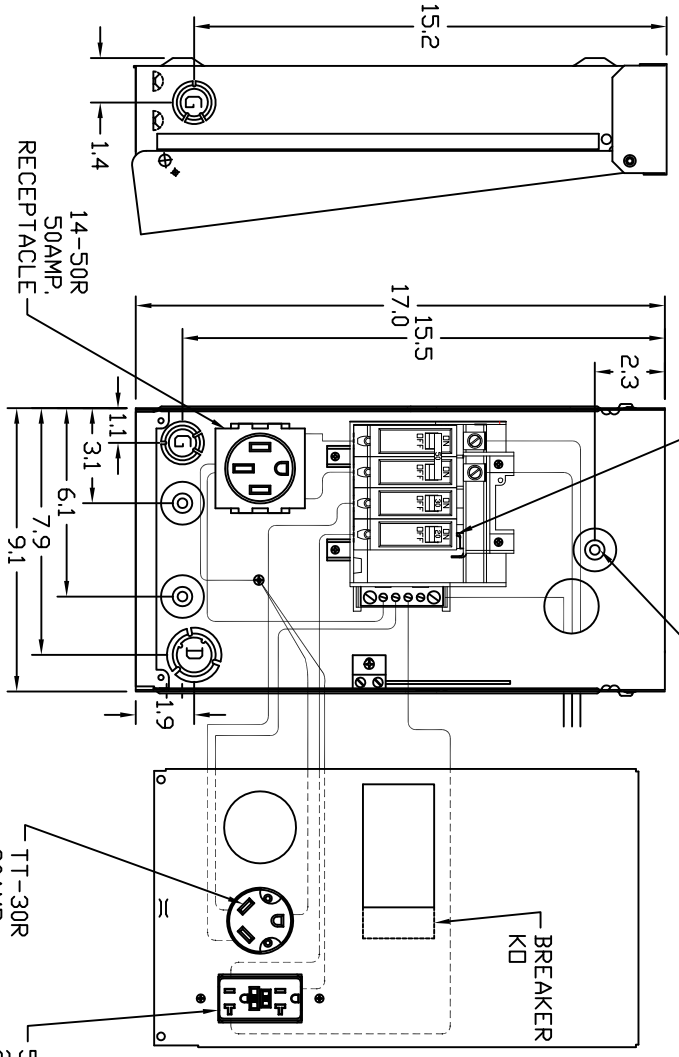

WIRE RANGE TABLE :

CONNECTOR	COPPER	ALUMINUM
	SQ. ID	SQ. ID
LINE	14-8	12-10
LOAD	14-10	12-10
NEUTRAL LARGE HOLE	12-8	10-1/0
NEUTRAL SMALL HOLE	14-8	12-10
POST LINE CONNECTORS SUITABLE FOR LODP FEED	#6-350 KCMIL	#6-350 KCMIL
EQUIP. GRND.	12-2	12-2
EQUIP. GRND. POST	14-2/0	14-2/0



Unless Otherwise Specified
 Tolerances Dim.
 3 Pl. Decimals ± .010
 2 Pl. Decimals ± .030
 Fractions ± 1/32
 Angles ± 1/2°
 Holes ± .003

* = Critical To Quality

TITLE: H75B3
 HEAD OUTLINE

AutoCad Generated
 Dr. By: ST Dt: 11-16-09 CR: R0729847
 Ck. By: Dater: 11-16-09

Dimensions Are In Inches

SHEET 1 OF 2

DWG NO: 198B8604

Rev. 1 R0729847 ST 11-16-09
 Rev. 2 R1318112 DJ 09-16-13
 Rev. 3 R1401763 DJ 02-20-14