


Top View



Configuration




Front View Interior

Front View Inside Cover

Front View External # 1

Front View External # 2

Side View

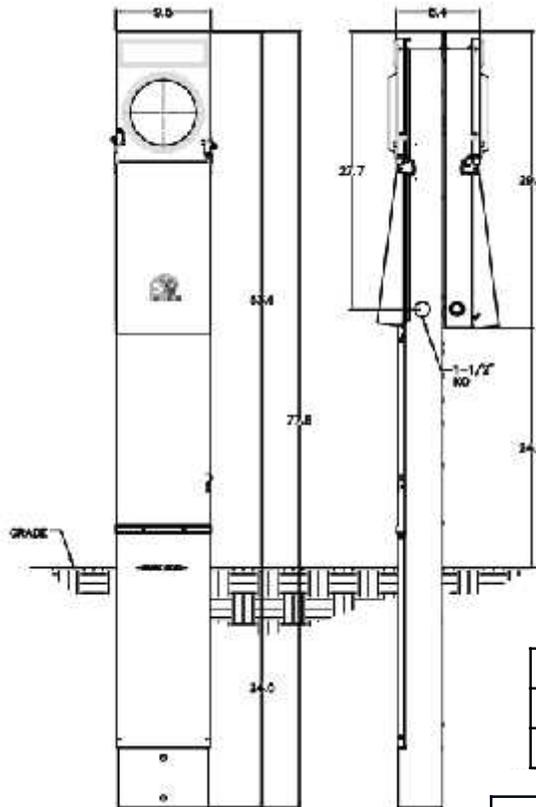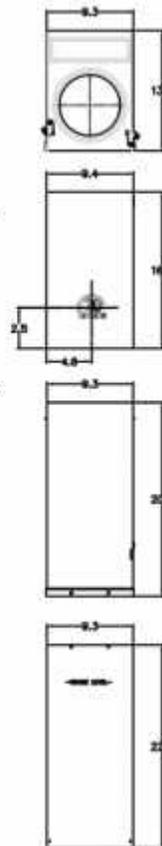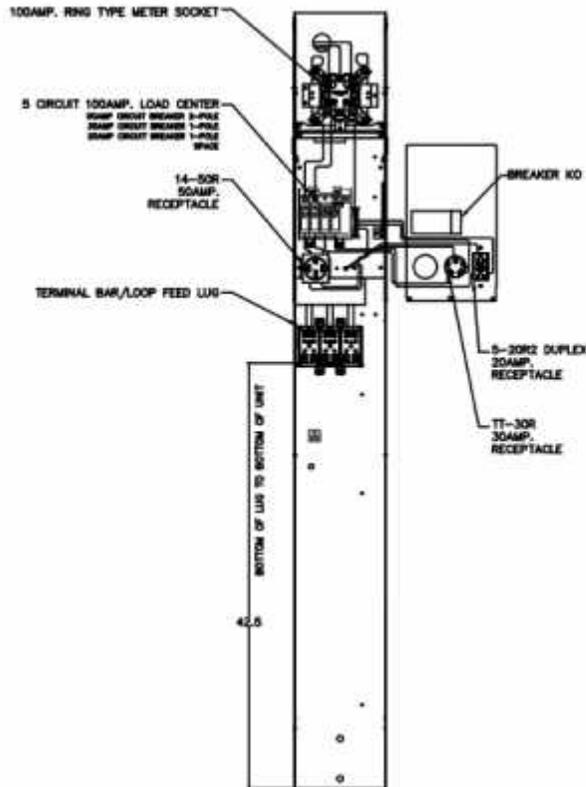

WIRE RANGE TABLE :

CONNECTOR	COPPER		ALUMINUM	
	SOLID	STRAND	SOLID	STRAND
LINE	---	6-1/0	---	6-1/0
LOAD	14-10	14-10	---	---
NEUTRAL LARGE HOLE	12-6	12-1/0	10	10-1/0
NEUTRAL SMALL HOLE	14-8	14-4	12-10	12-4
POST LINE CONNECTORS SUITABLE FOR LOOP FEED	#8-350 KCMIL		#8-350 KCMIL	
EQUIP. GRND.	12-2	12-2	12-2	12-2
EQUIP. GRND. POST	6-250	6-250	4-350	6-350

Receptacles

Circuit Protection

5-20R2
TT-30R
14-50R

THQL1120
THQL1130
THQL2150

NOTES: EARTH BURIAL POST


1 OF 2



CUL 9 RINGLESS EARTH BURIAL POST B/B 100A

CAT NO	DWG DATE	REV #
RH75B3	02/15/2018	01

Top View



Configuration



Front View Interior

Front View Inside Cover

Front View External # 1


Front View External # 2

Side View

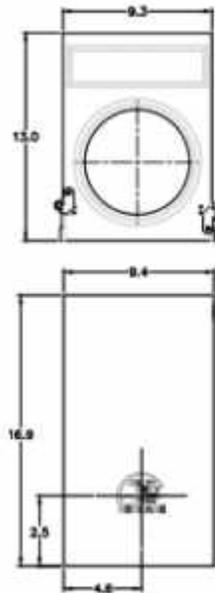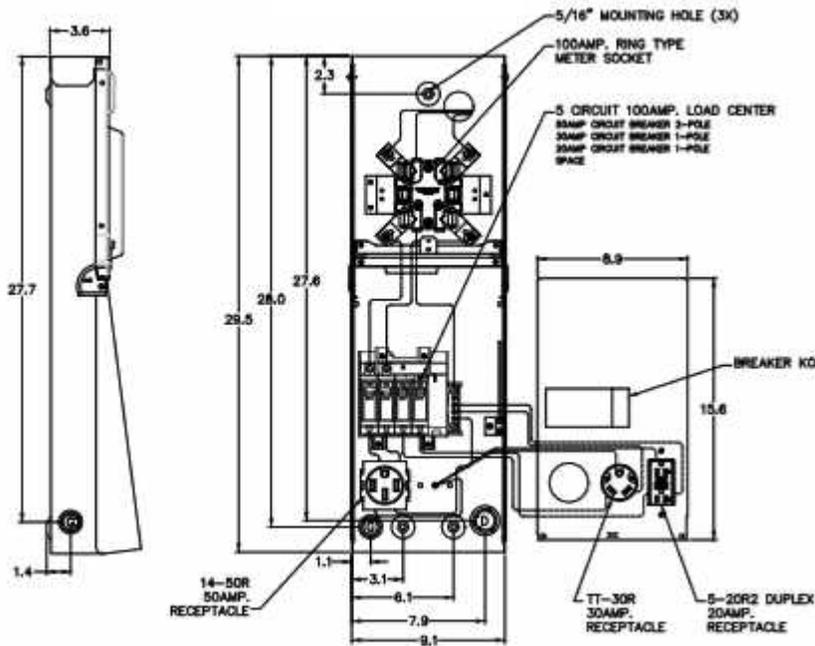

KNOCKOUT TABLE:

H=	9/32" KO
G=	1/2", 3/4", 1" KO
B=	1", 1-1/4", 1-1/2" KO
D=	3/4", 1", 1-1/4" KO



Receptacles

Circuit Protection

5-20R2
TT-30R
14-50R

THQL1120
THQL1130
THQL2150

NOTES: EARTH BURIAL POST

2 OF 2

CUL 9 RINGLESS EARTH BURIAL POST B/B 100A

CAT NO	DWG DATE	REV #
RH75B3	02/15/2018	01